


MAXON®

Slidelift

Spare Parts Catalogue

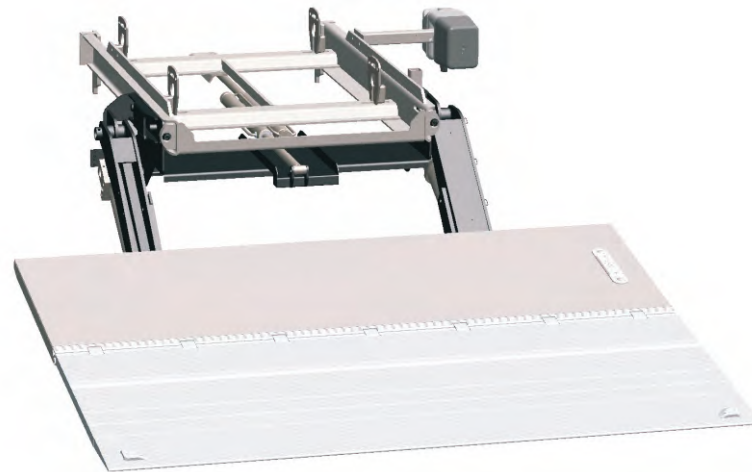


GPST 44 X1




Document no. S 20 909 841
© Sörensen Hydraulik GmbH
2011


Slideframe

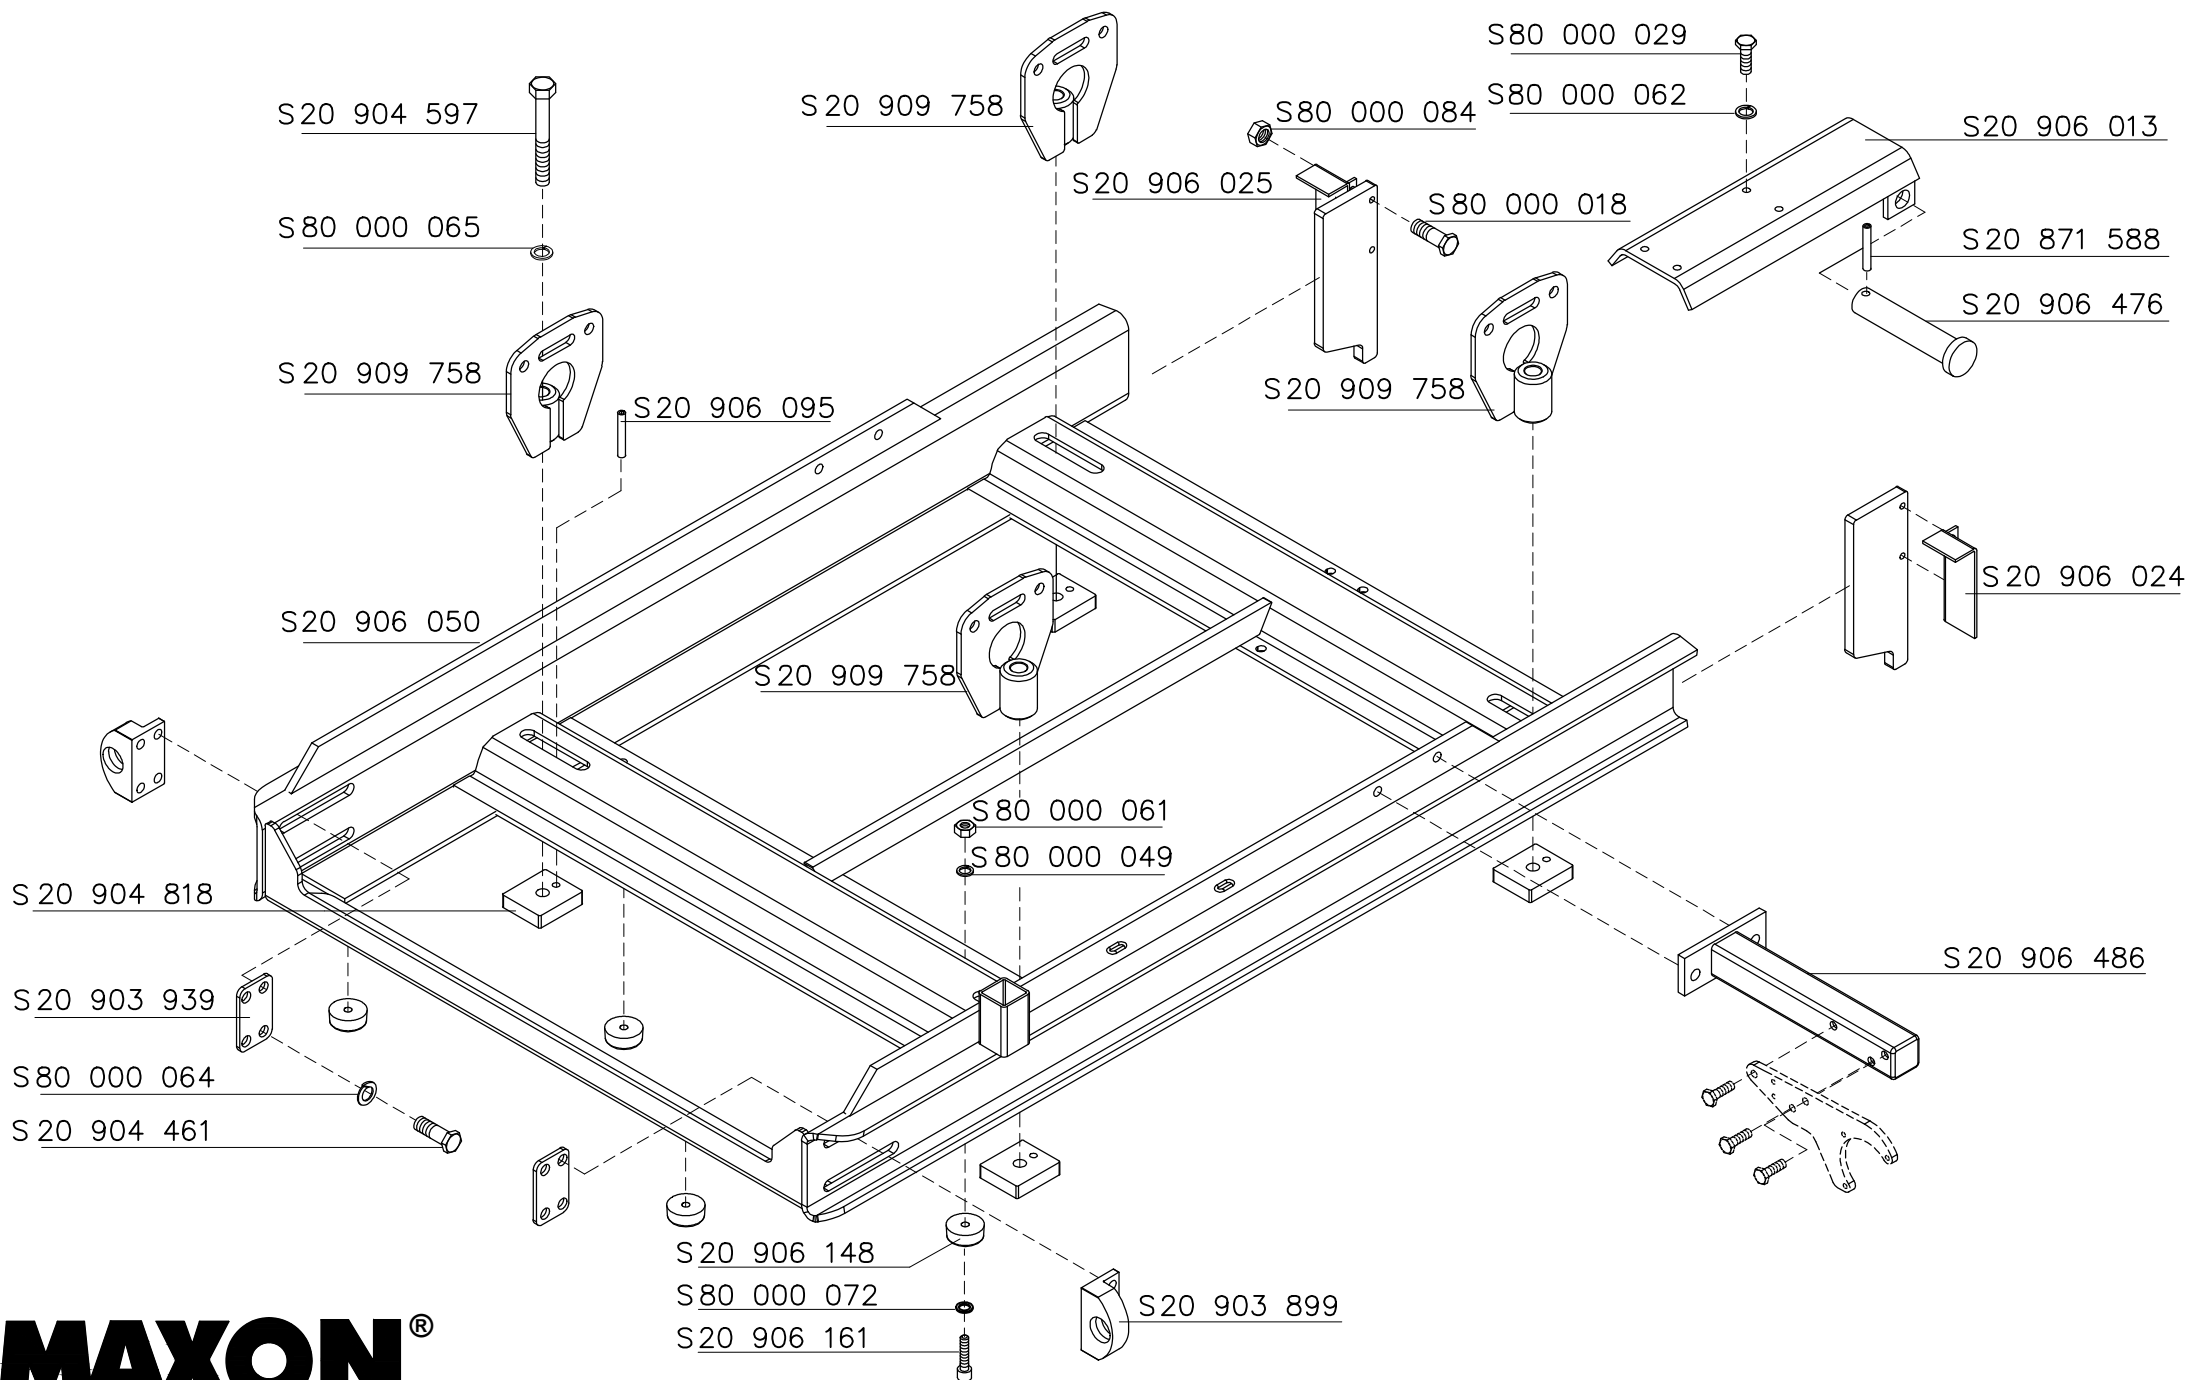

Wagon

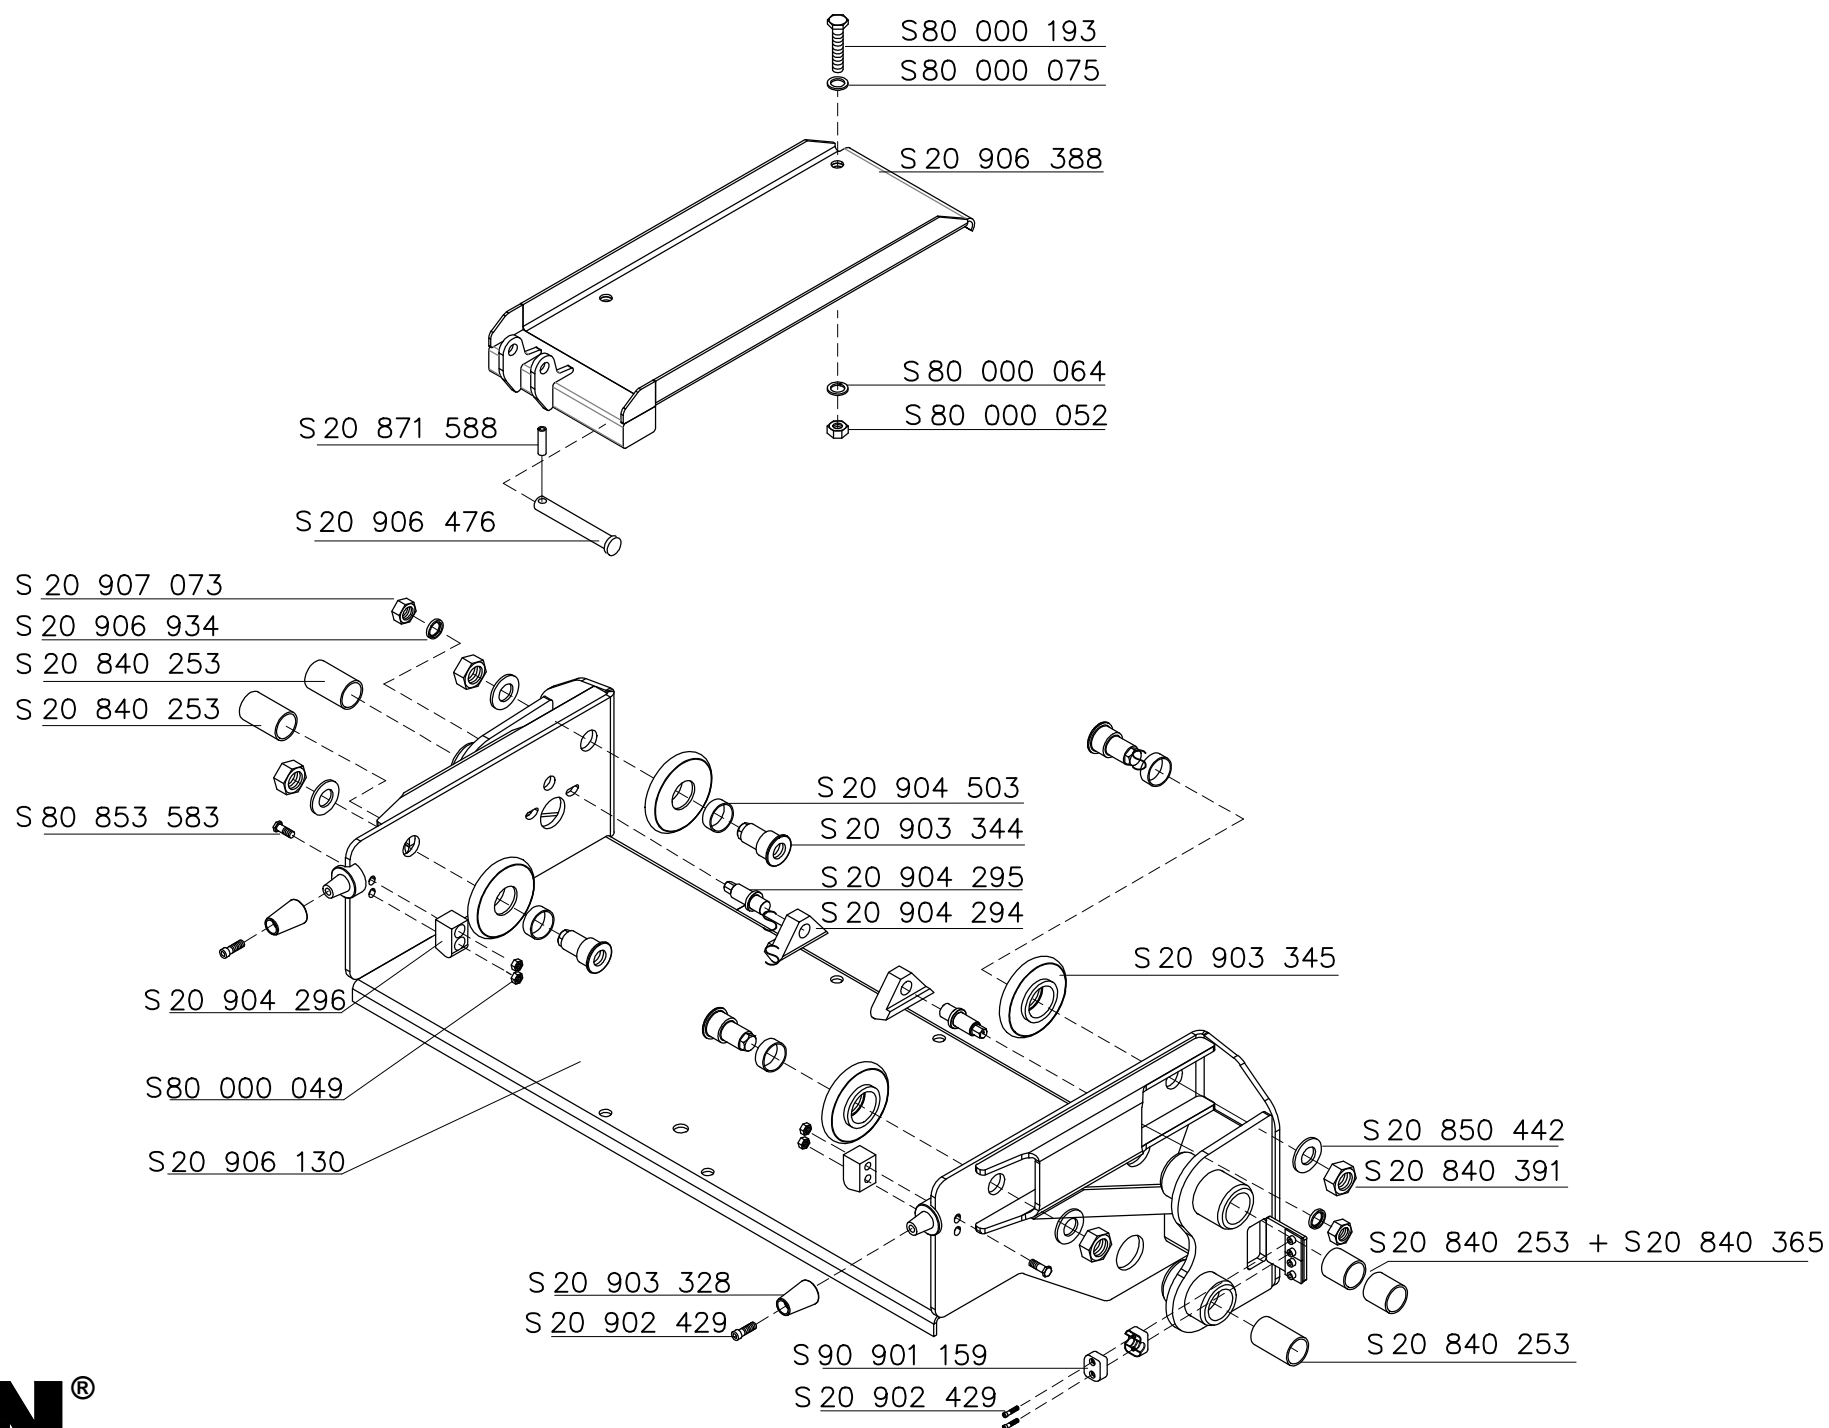

Lifting mechanism

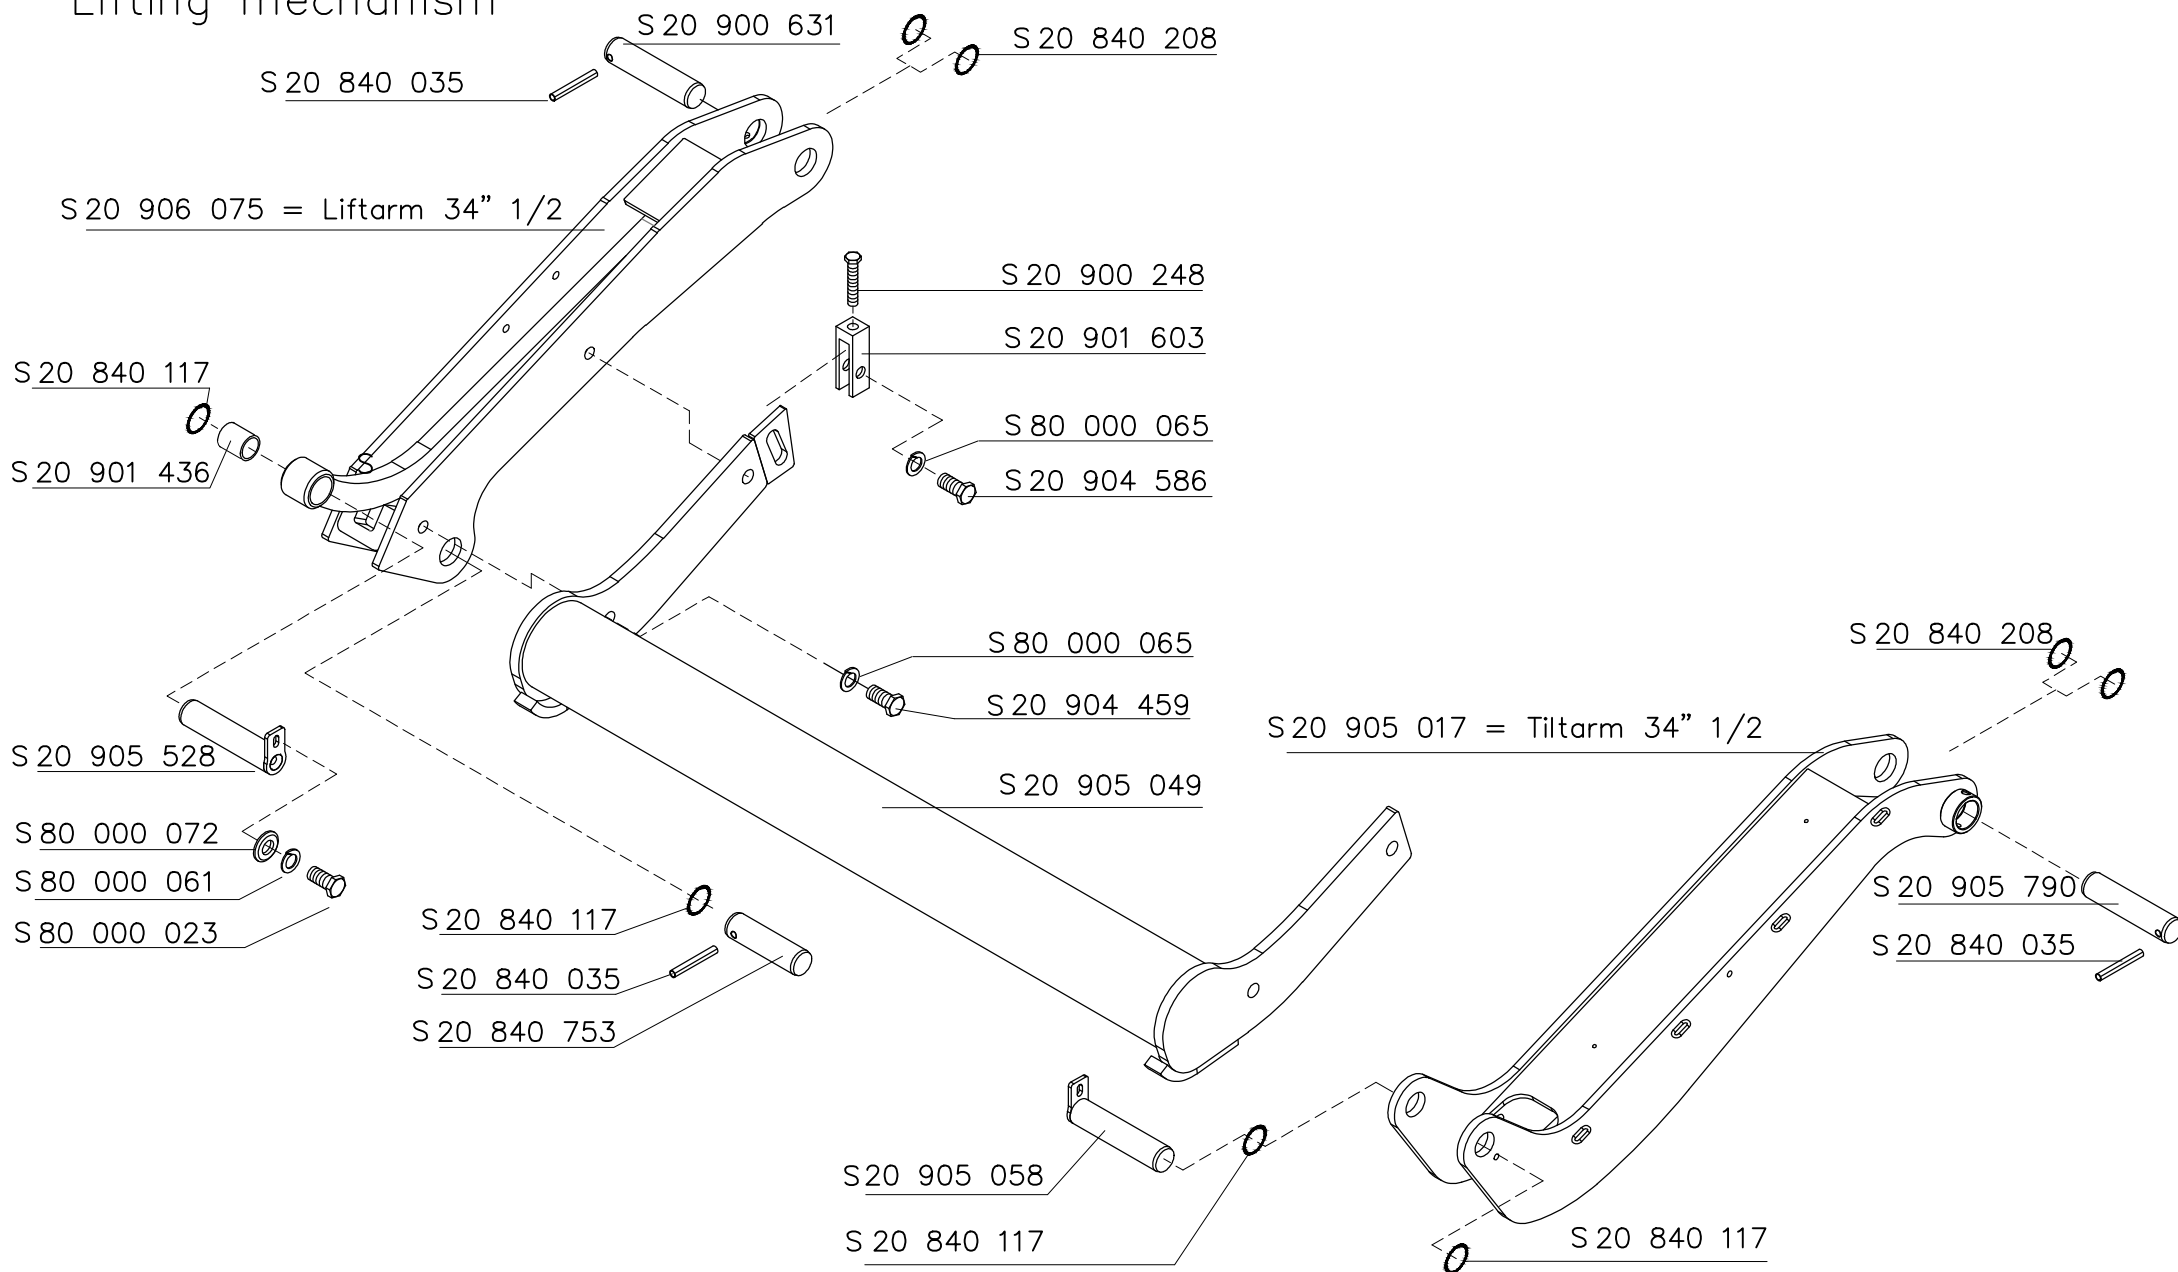

Platform
42 220 104

S 20 852 376

S 20 853 463

S 20 840 508

S 20 851 223

S 20 906 162

S 20 906 160

S 20 906 147

S 20 901 222

S 20 868 706 spring tilt down

S 20 868 707 spring tilt up

S 20 905 770

S 20 906 135

Steel

**ATTENTION
BY SLIDING!**

Parallel to the slide frame

No contact between
slide frame and platform

Contact

Slide frame
overloaded

MAXON®

No. 20 007 000

S 20 907 995

S 20 840 504

S 20 901 436

S 20 852 376

S 20 853 463

S 20 905 142

S 20 900 810

S 20 906 186

S 20 906 142

S 20 902 429

S 80 000 062

S 20 909 471

S 20 906 136

S 20 905 254

S 20 906 196

S 80 000 006

S 22 905 568

S 20 906 056

S 80 000 084

cable compiled
S 20 907 262

S 20 852 373

S 90 890 011

S 00 810 840

only the mercury switch

S 20 903 572

only the mercury switch

S 20 906 141


S 20 909 470

S 10 830 406

MAXON®

GPST 44 X1


Sliding cylinder
S 20 906 150

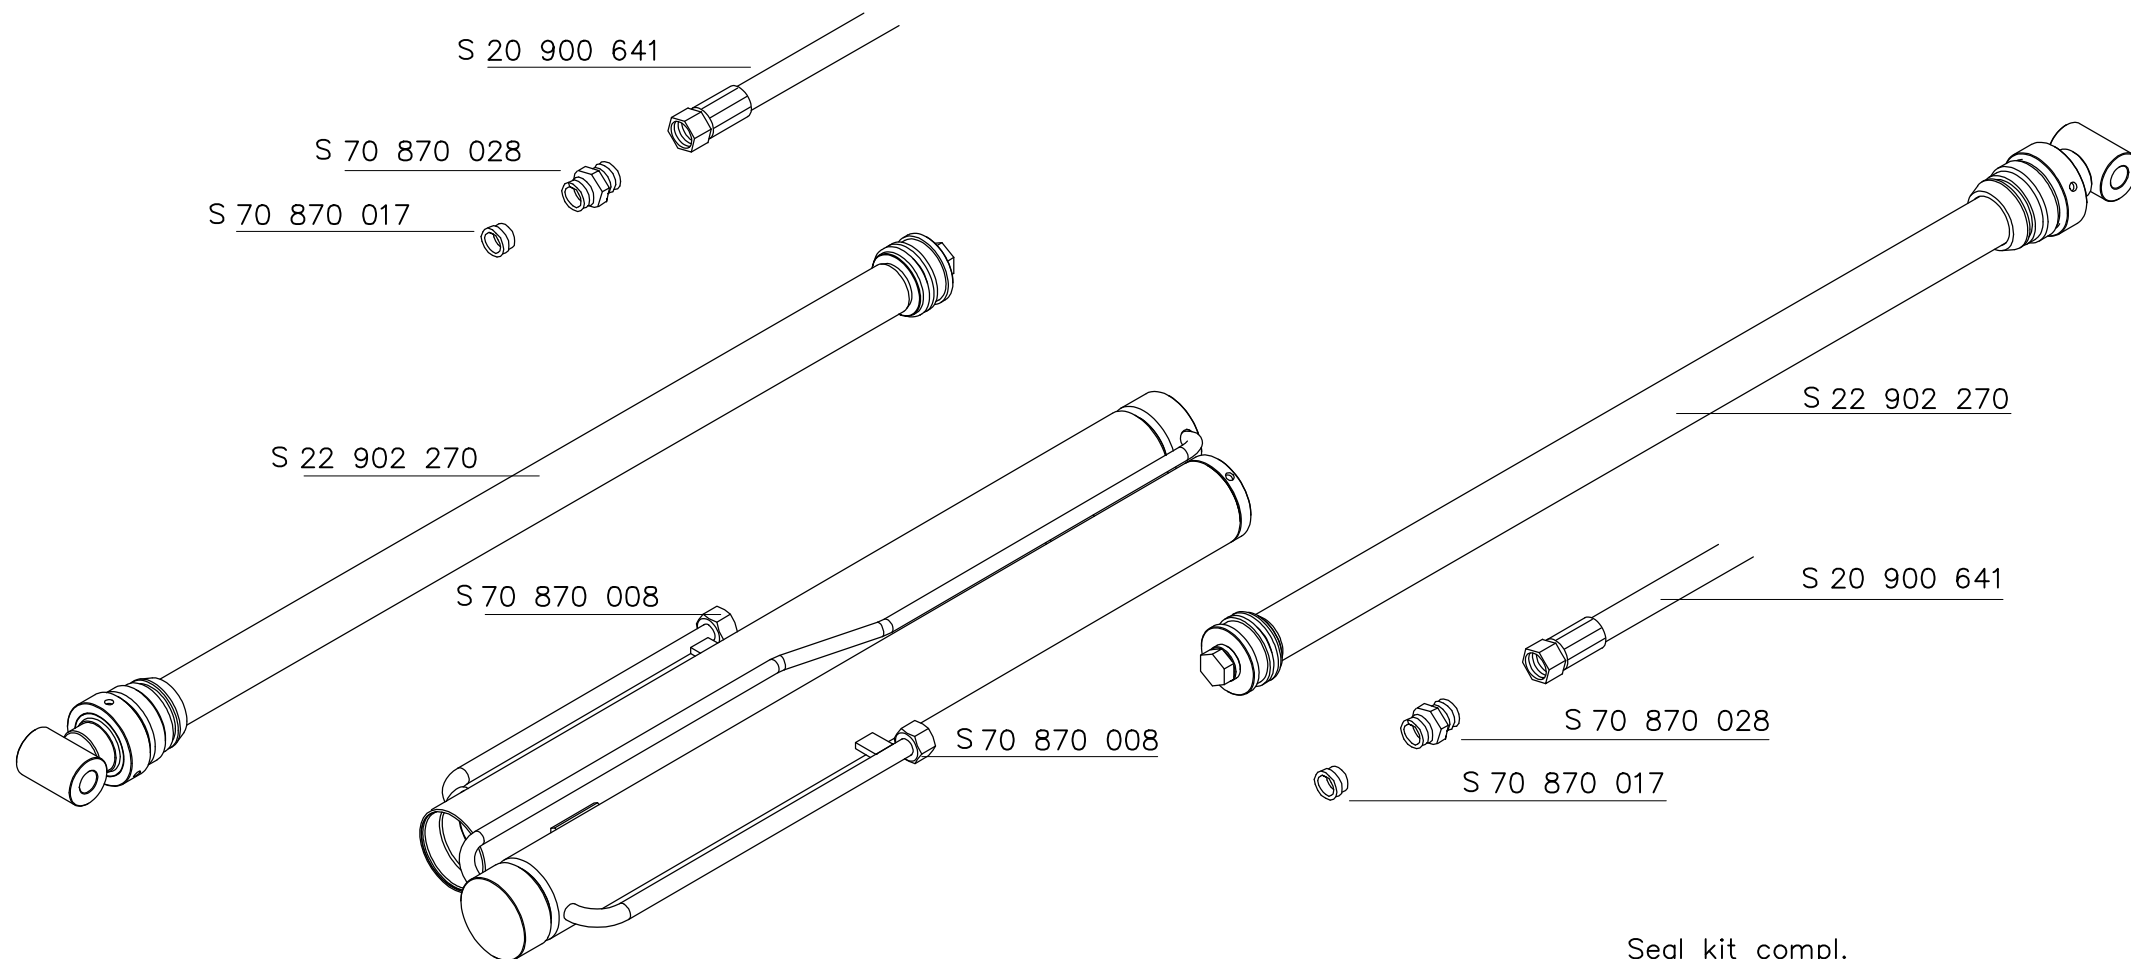

Seal kit compl.
S22 902 269

Tilting cylinder S 20 905 492


Seal kit compl.
S 22 902 308

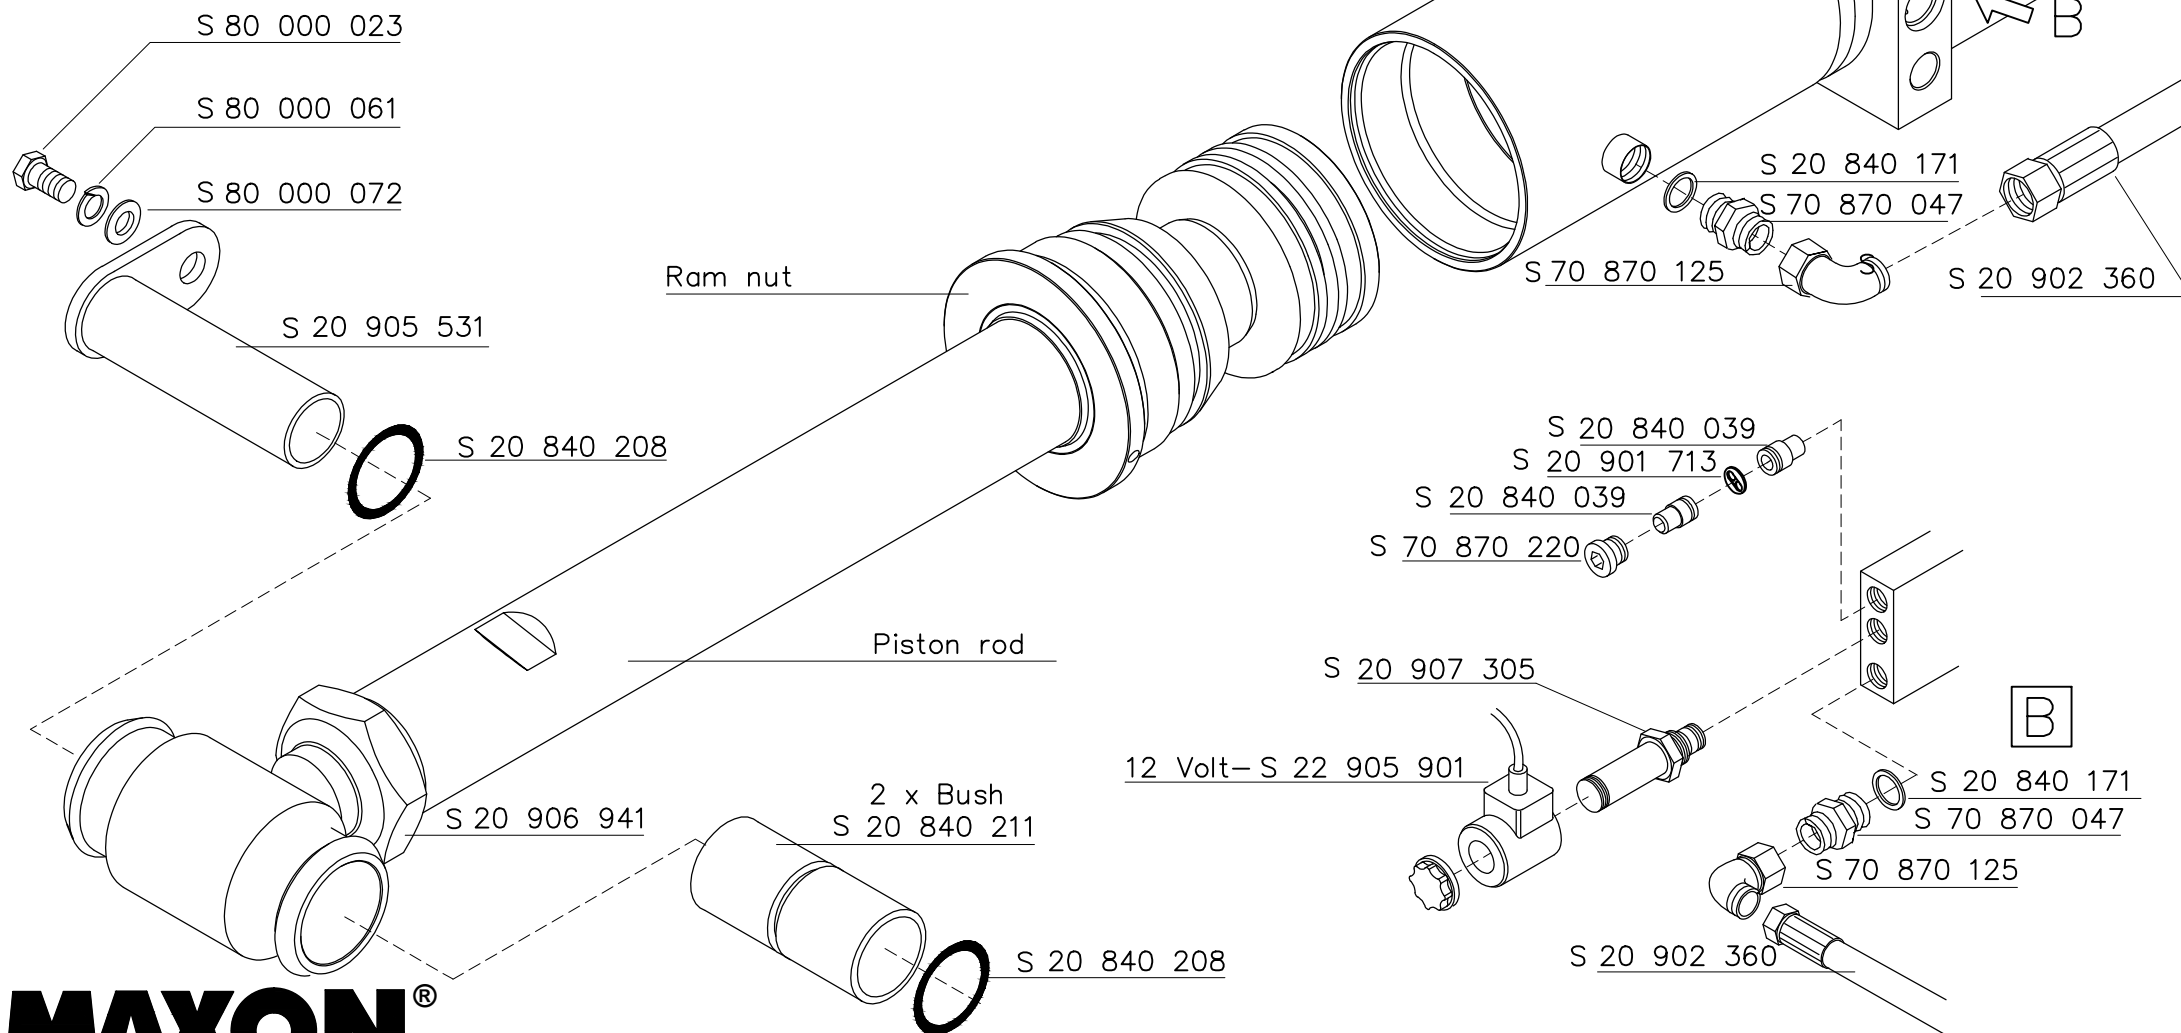

MAXON[®]
GPST 44 X1

Lift cylinder liftarm 34"1/2 S 20 905 489

Seal kit compl.
S 22 902 275

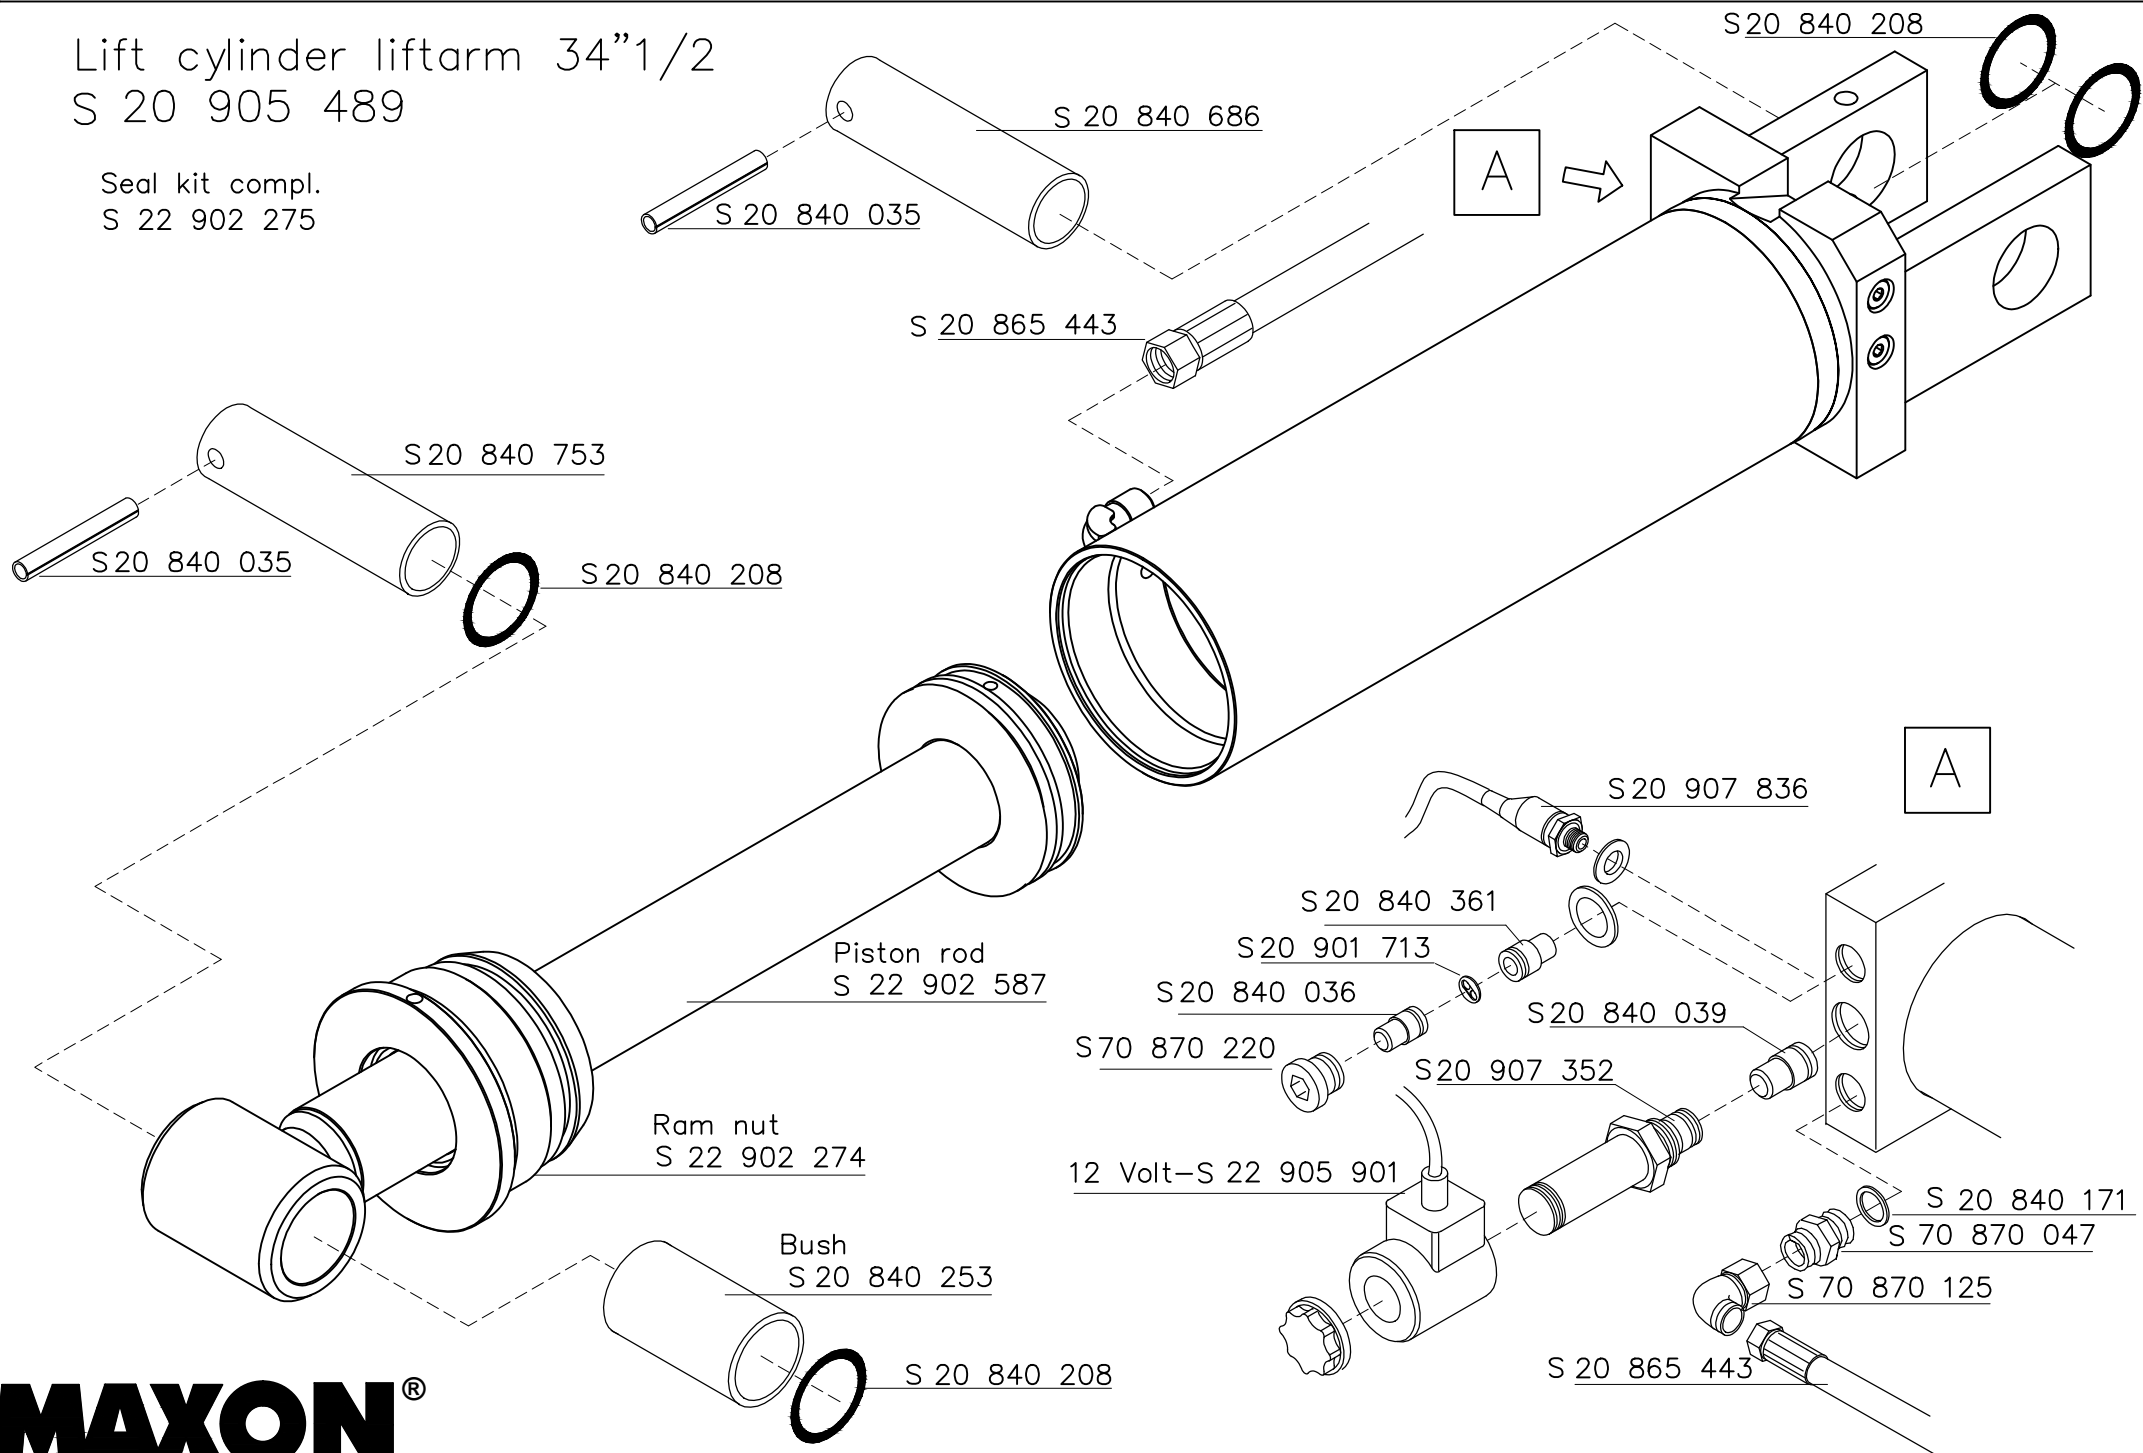

MAXON®
GPST 44 X1

Powerpack 12Volt

S 20 909 760

Hydraulic oil - recommendations

OIL SPECIFICATIONS

Grade ISO - (32)

Gravity, API - 29.5 Degrees

Pour Point, F - (-54 Degrees)


VISCOSITY

@ 40 Degrees C - 31.2 cSt


@ 100 Degrees C - 6.2 cSt

VISCOSITY INDEX - 154 VI


Flash Point, F - 325 Degrees

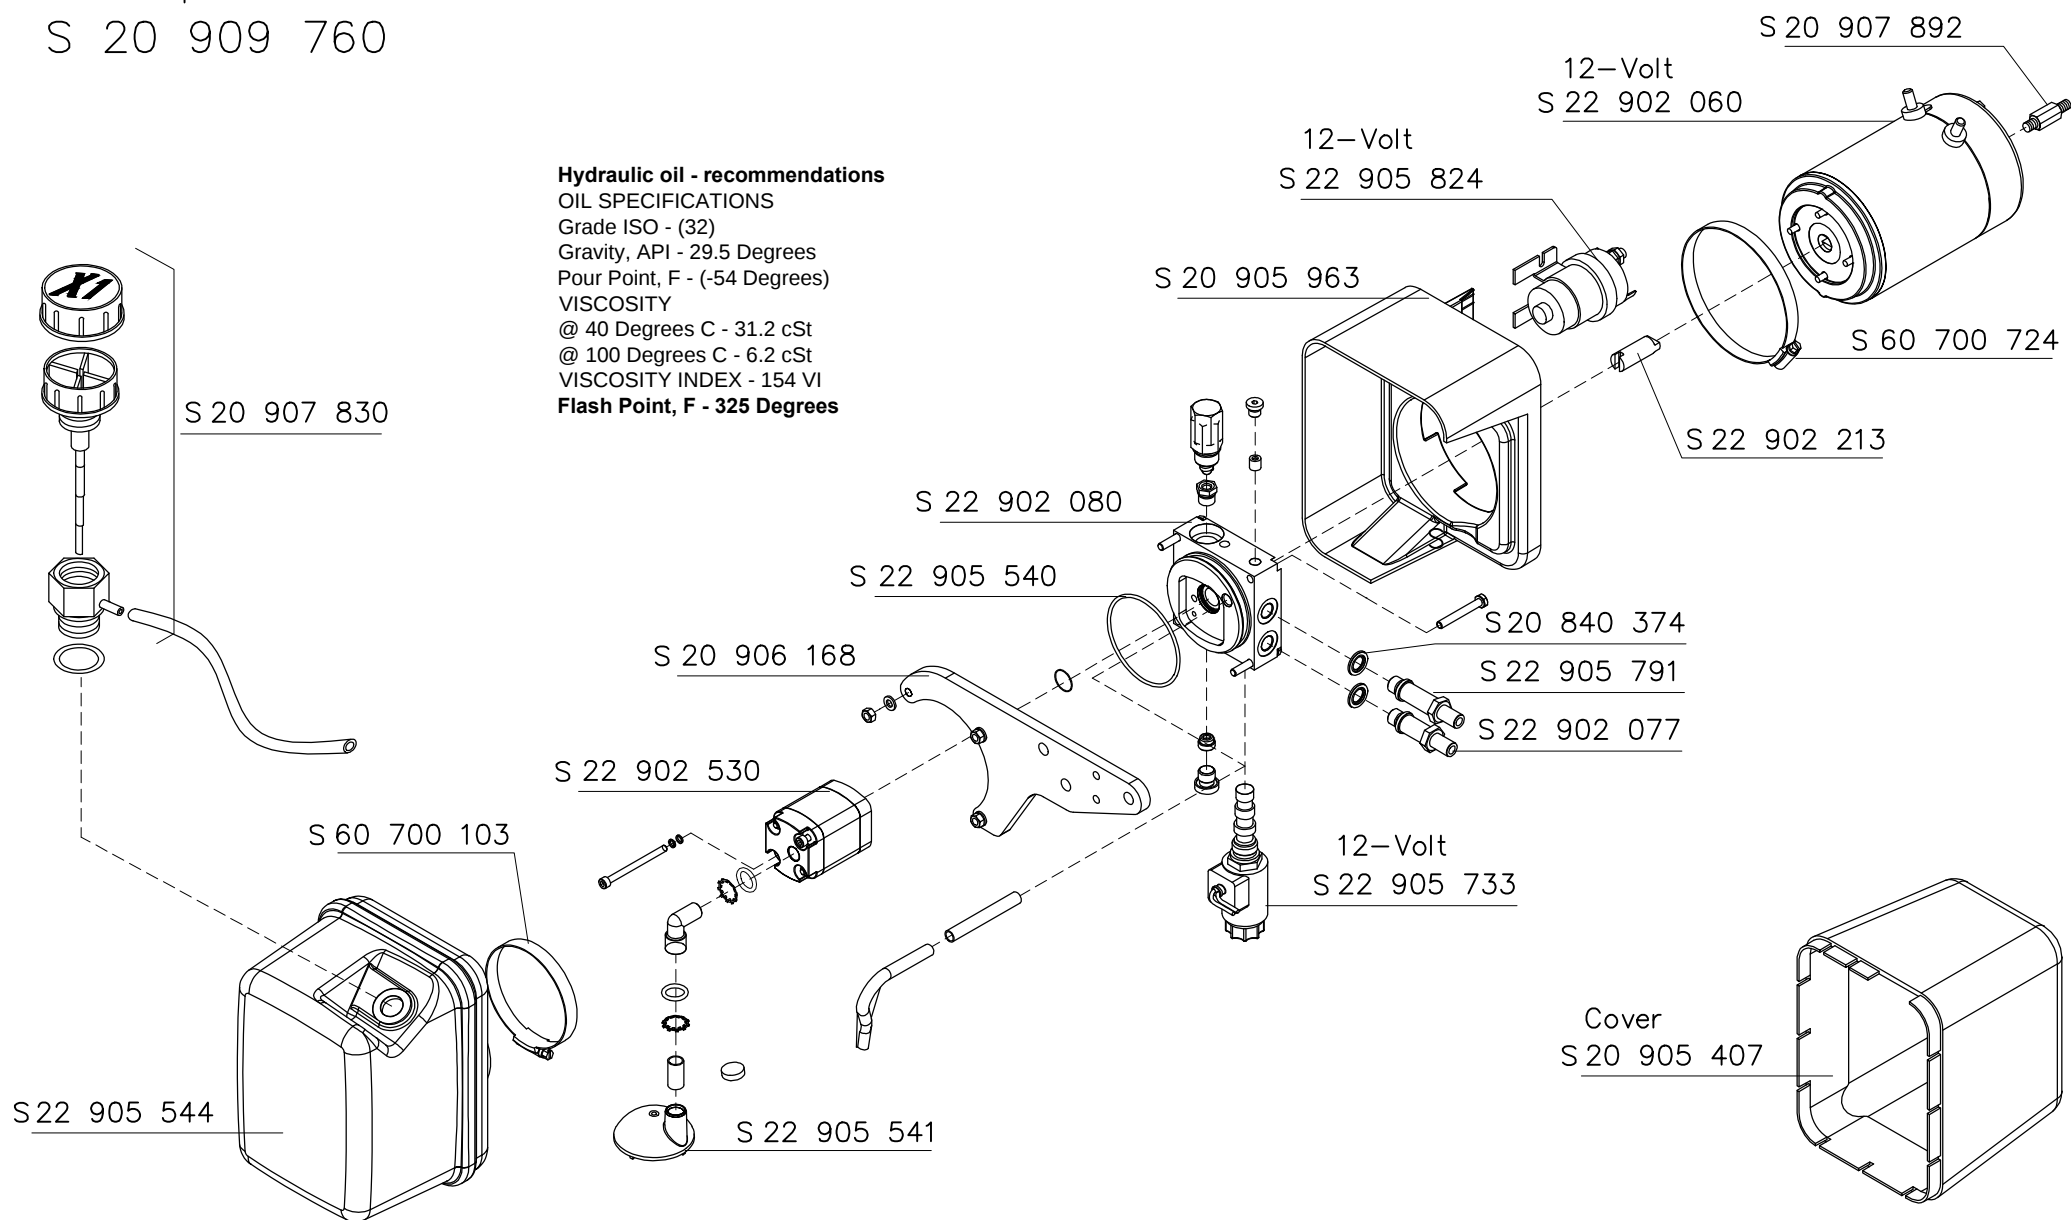






Footcontrol

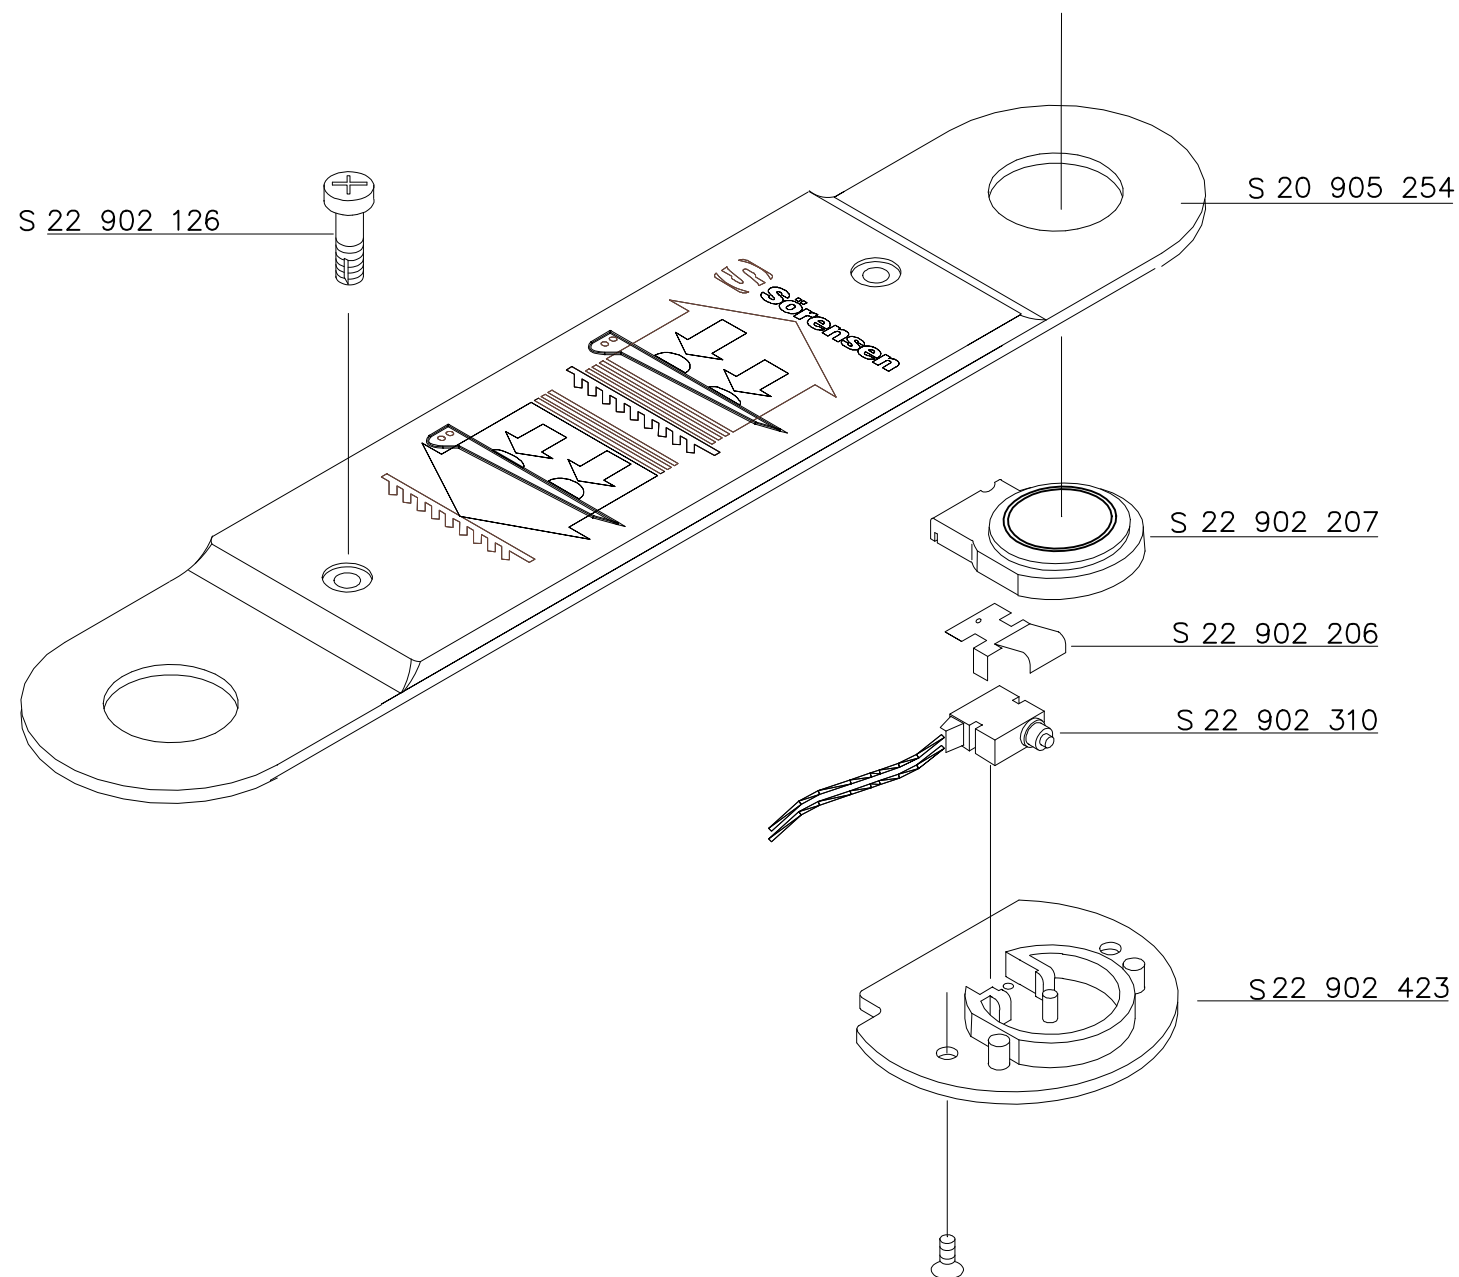

Handcontrol 20 460 351

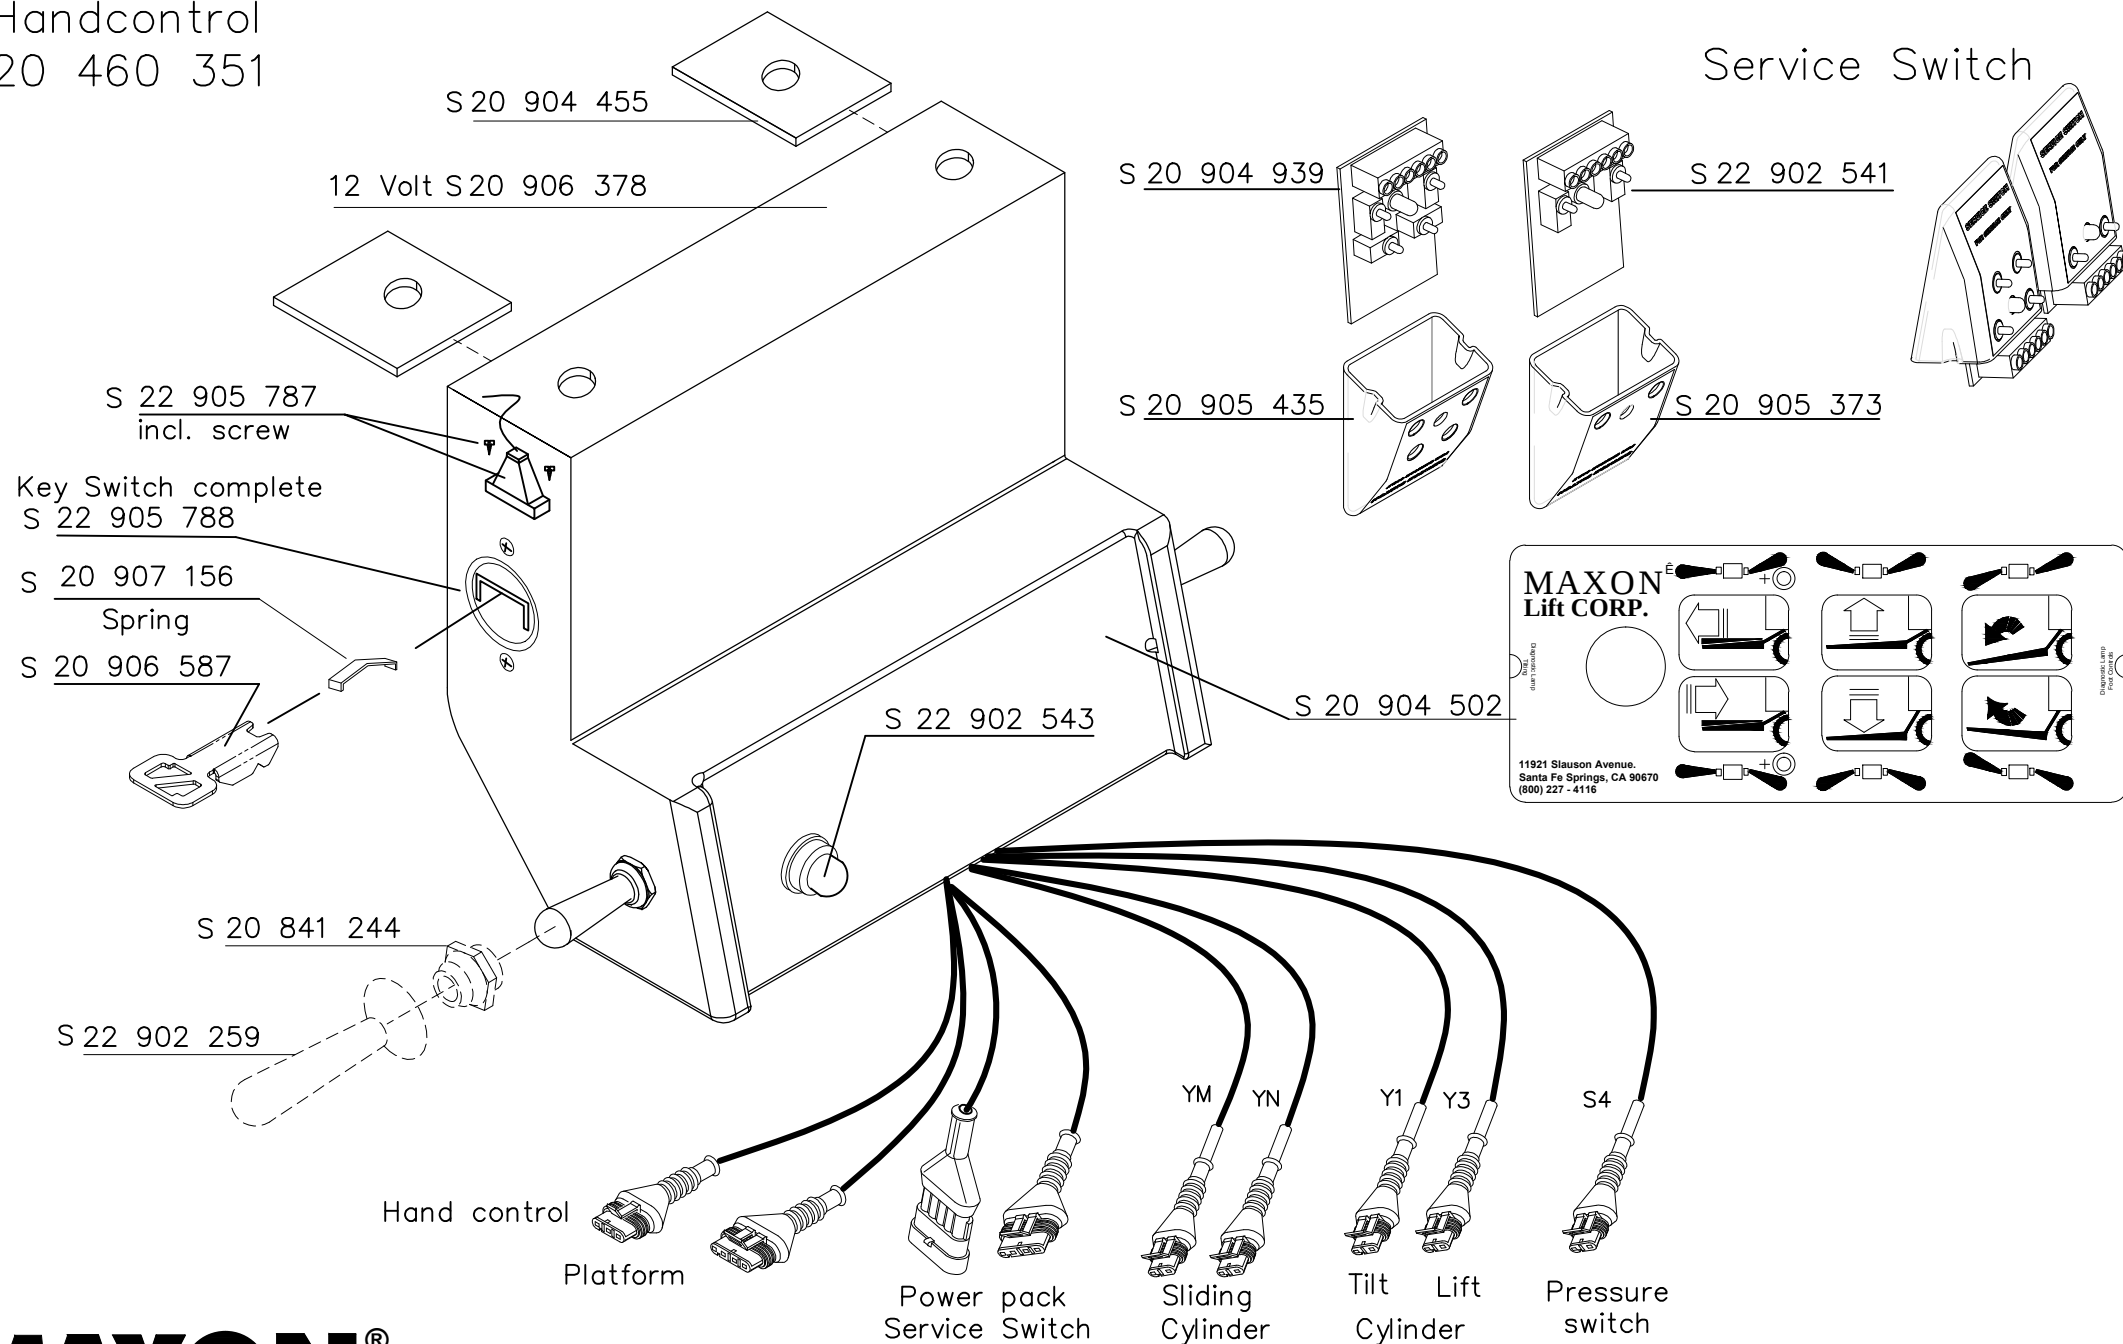


Hand held control

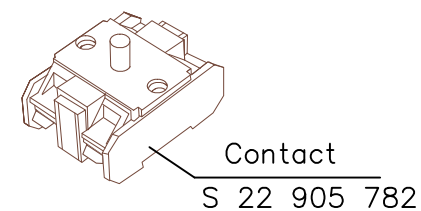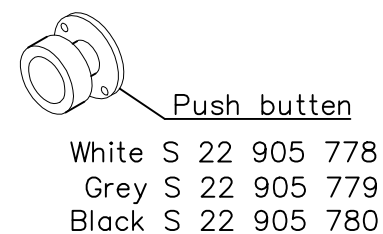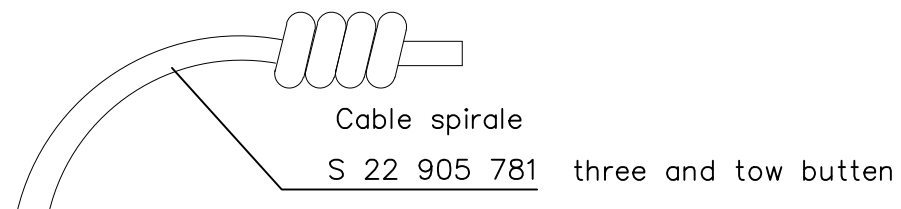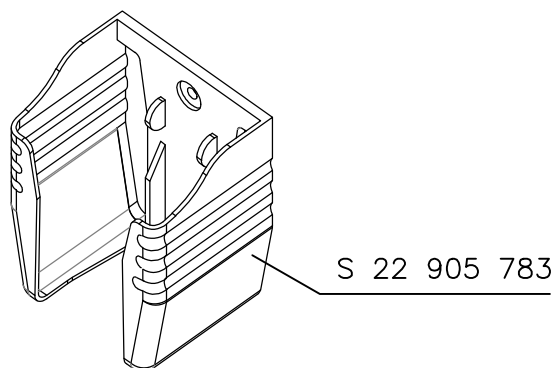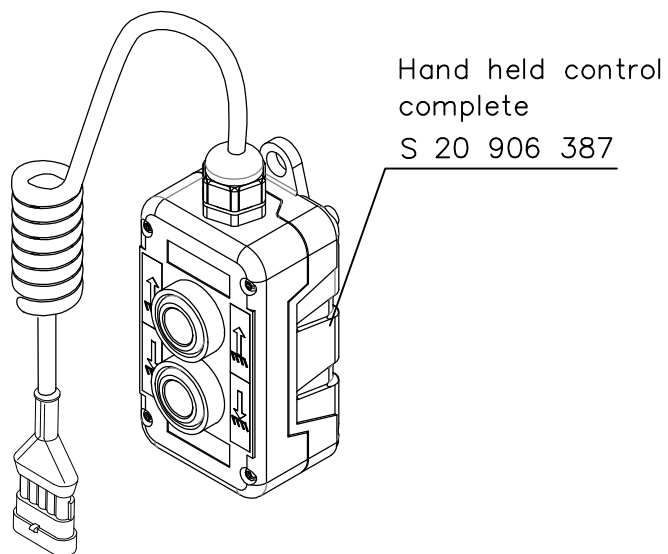

Hydraulicfitting

Tube kit compl. S 20 907 773

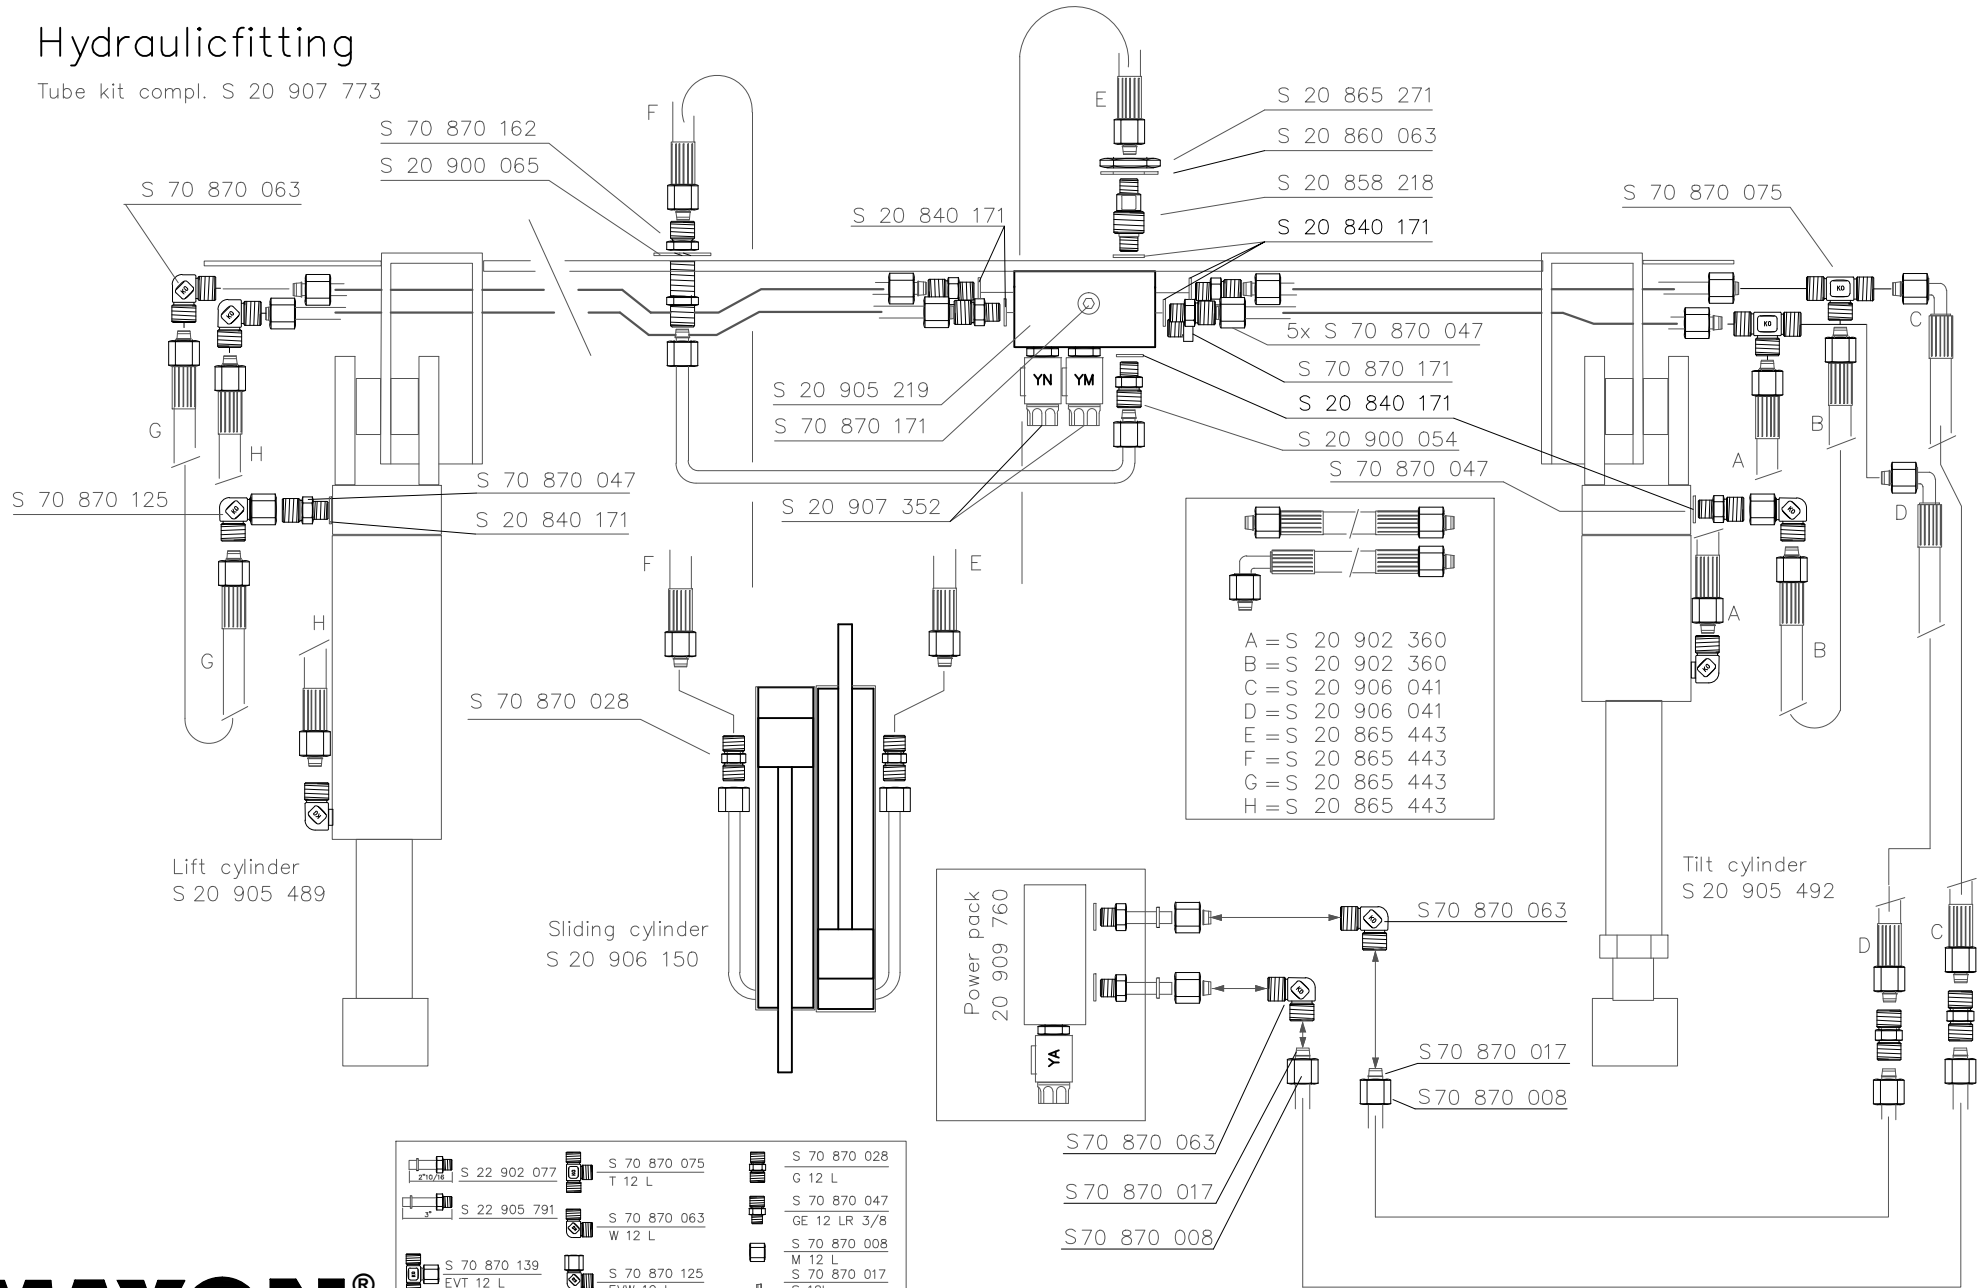

MAXON®
GPST 44 X1